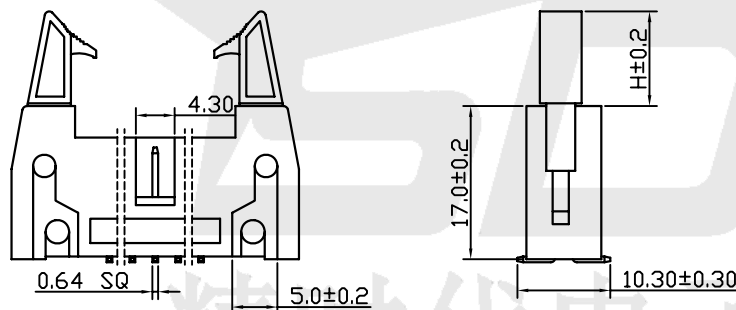



P.C.B LAYOUT

SPECIFICATIONS (技术参数)

Current Rating (额定电流: 3.0 Amps

Contact Resistance (接触电阻): 30mΩ Max

Insulator Resistance (绝缘电阻): 1000 MΩ min.

Dielectric Withstanding (耐压值): AC 600V/minute

Operating Temperature (工作温度): -40℃+105℃

JSD	FH	XX	X	X	X	XX	X	X	X	XXX	X
Brand 品牌											Locate the column (定位柱) 0=No fixed 没有固定 1=Have a fixed 有固定
Ejector Header 筒牛插座											Pin length 针的总长度
Pitch 间距 (Unit:mm)											Material Type 塑胶体材质 0=PBTT 3=PA9T 1=PA46 4=LCP 2=PA6T
10=1.00 12=1.27 20=2.00 25=2.54											Contact Plated 镀层 0=Tin 锡 3=Gold 1.5U金 6=Gold 5U金 1=Gold 0.8U金 4=Gold 2U金 7=Gold 10U金 2=Gold 1.0U金 5=Gold 3U金 8=Gold 15U金
Ear height 耳朵高度 (Unit: mm) A=4.35 B=8.00											Mounting Style 安装方式 S=Straight DIP Type 180度直插板 R=Right Angle DIP Type 90度插板 M=SMT vertical stick Type 立贴板
Grooving direction 开槽方向 0=In the middle (中间) 1=On both sides of the (两边)											Number of contacts 触点总数 Double row=06 to 140Pin
Add an insulator 添加绝缘体 0=There is no (没有) 1=There are (有)											

No. of Contacts	A	B	C
10	31.90	21.84	10.16
14	36.98	26.92	15.24
16	39.52	29.46	17.78
20	44.60	34.54	22.86
26	52.22	42.16	30.48
30	57.30	47.24	35.56
34	62.38	52.32	40.64
40	70.00	59.94	48.26
50	82.70	72.64	60.96
60	95.40	85.34	73.66
64	100.48	90.42	78.74

客户料号:	无	Units	mm	Scale		Drawing By	Date	深圳市精时代电子科技有限公司		
客户规格:	无	Tolerance Unless Otherwise Specified				2015年12月24日	官网: www.jsdconn.com		电话: 0755-33583386/33583396	
注:		.X	~	±0.30	Date	1 of 1	Title	平面设计	2.54mm牛角SMT立贴高低卡位系列	
		.XX	~	±0.30	Sheet			张火新	Drawing No.	JSDEH25X0XXXMXXXXXX-001
		.XXX	~	±0.30	Third Angle Projection			18824345453	F/Name	REV
REV	ECN.NO.	Angle	~	±0.30						B